
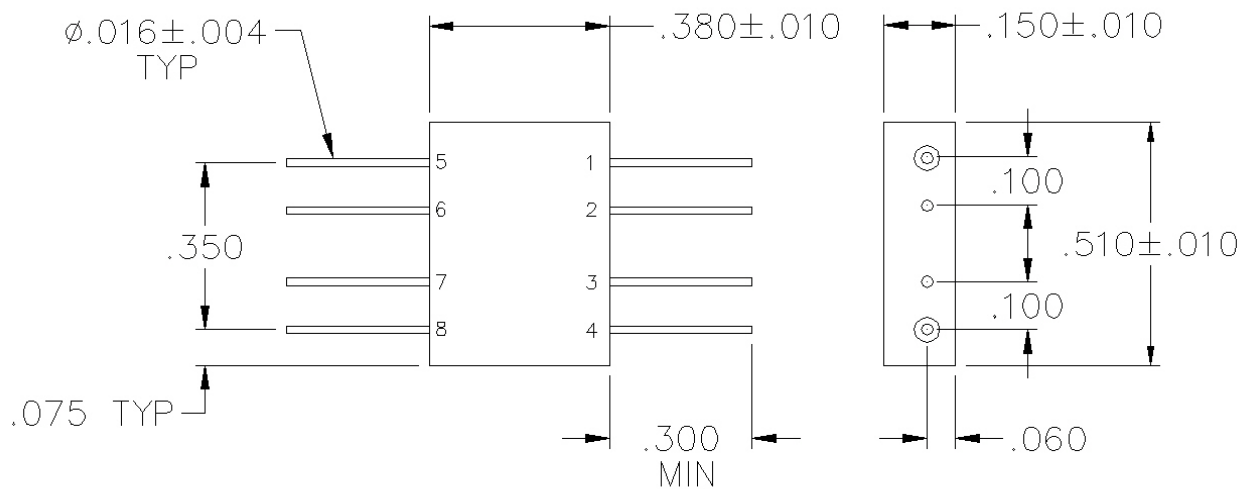


# P2-15-301

## 2-WAY FLATPACK POWER DIVIDER



### SPECIFICATIONS

|                    |              |
|--------------------|--------------|
| Name:              | P2-15-301    |
| Frequency Range:   | 5-2000 MHz   |
| Insertion Loss:    | 1.8 dB max.  |
| Isolation:         | 20 dB min.   |
| Amplitude Balance: | 0.4 dB max.  |
| Phase Balance:     | 6° max.      |
| VSWR:              | 1.60:1 max.  |
| Input Power:       | 1 watts max. |
| Package Type:      | Pin          |

### PORT CONFIGURATION

|         |          |
|---------|----------|
| Input:  | 8        |
| Output: | 5, 1     |
| Ground: | 2-4, 6-7 |

Input power is specified for load VSWR better than 1.20:1.  
75 Ohm and higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 190403