


P3-04-433/8S

3-WAY SMA POWER DIVIDER

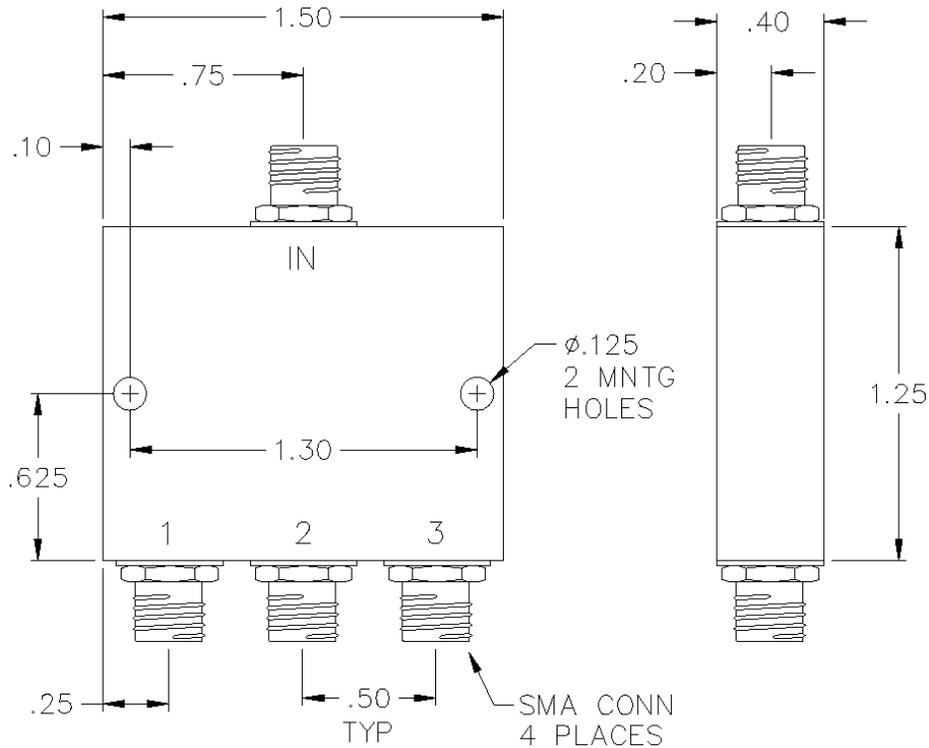

SPECIFICATIONS

Name:	P3-04-433/8S
Frequency Range:	10-1000 MHz
Insertion Loss:	1.2 dB max.
Isolation:	22 dB min.
Amplitude Balance:	0.3 dB max.
Phase Balance:	4° max.
VSWR:	1.50:1 max.
Input Power:	1 watts max.
Package Type:	SMA

PORT CONFIGURATION

Input:	1
Output:	2, 3, 4
Ground:	Housing

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.
BNC, TNC, and F connectors and other frequency ranges also available, contact sales.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 220627

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION