


# P3-05-B

## 3-WAY SURFACE MOUNT POWER DIVIDER

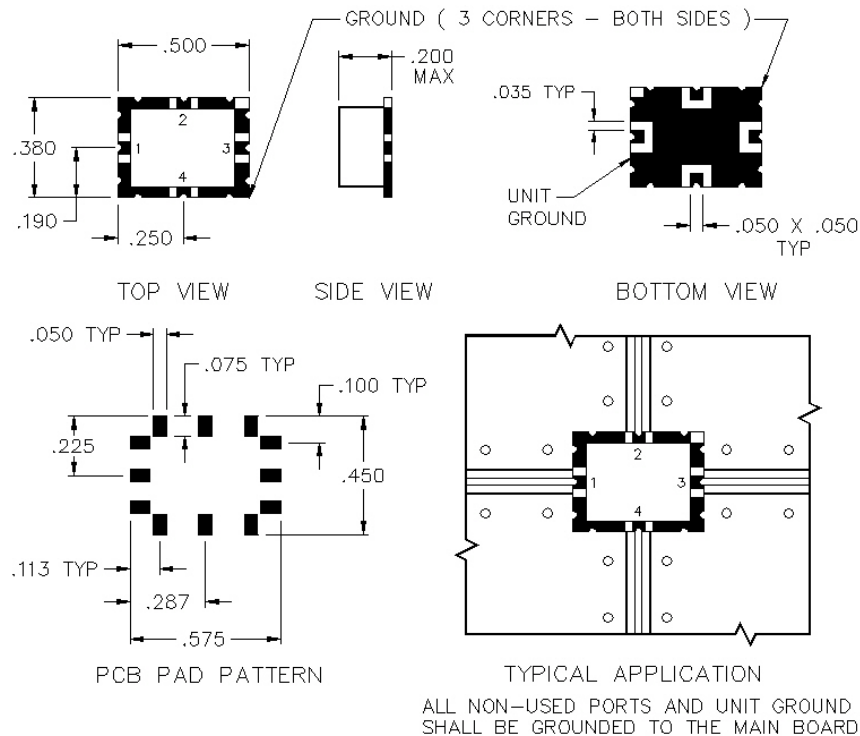

## SPECIFICATIONS

|                    |              |
|--------------------|--------------|
| Name:              | P3-05-B      |
| Frequency Range:   | 20-1000 MHz  |
| Insertion Loss:    | 1.2 dB max.  |
| Isolation:         | 20 dB min.   |
| Amplitude Balance: | 0.6 dB max.  |
| Phase Balance:     | 5° max.      |
| VSWR:              | 1.50:1 max.  |
| Input Power:       | 1 watts max. |
| Package Type:      | Surface      |

Input power is specified for load VSWR better than 1.20:1.  
75 Ohm and higher power models available, contact sales.

## PORT CONFIGURATION

|         |           |
|---------|-----------|
| Input:  | 2         |
| Output: | 1, 3, 4   |
| Ground: | 4 Corners |

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 190326