


# P4-07-413

## 4-WAY SMA POWER DIVIDER

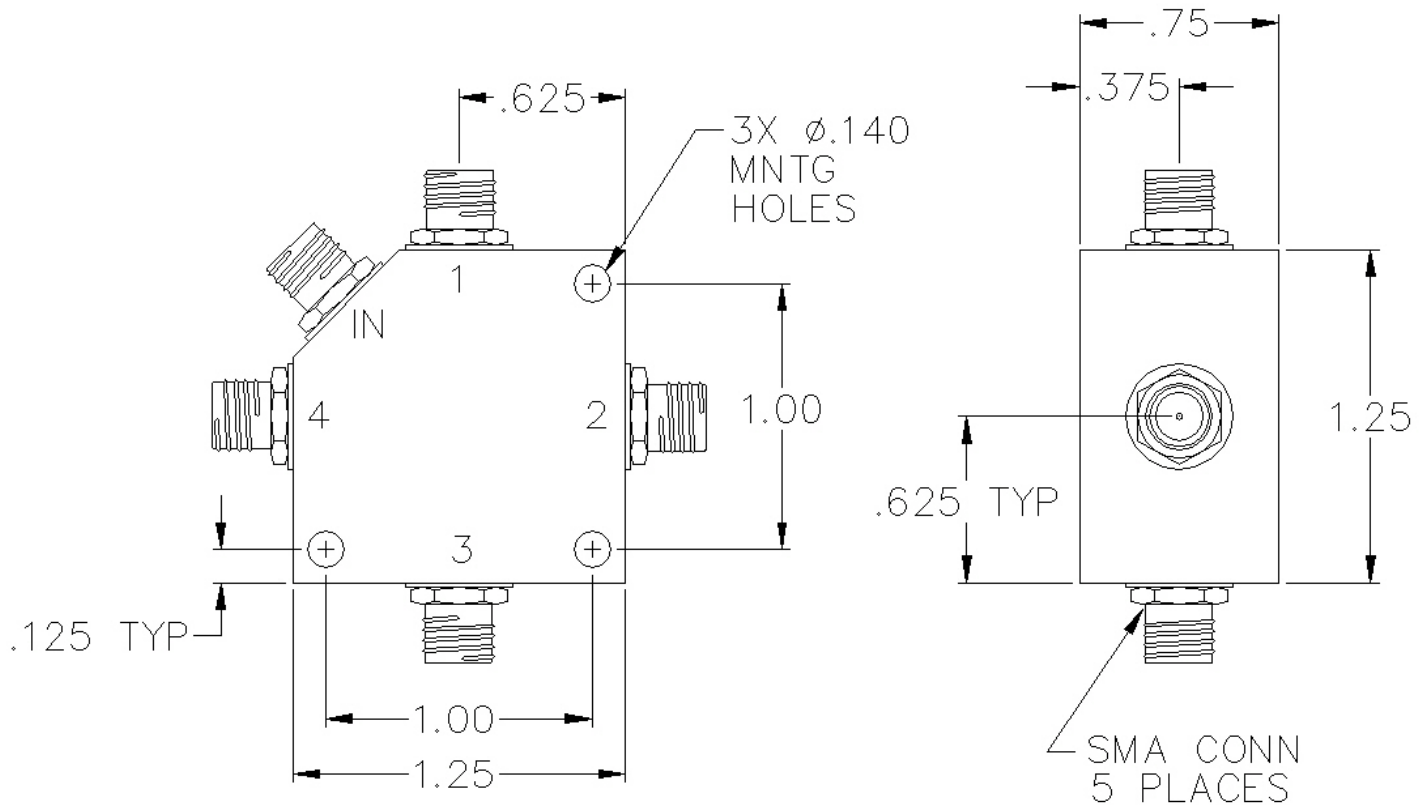

## SPECIFICATIONS

|                    |              |
|--------------------|--------------|
| Name:              | P4-07-413    |
| Frequency Range:   | 10-1000 MHz  |
| Insertion Loss:    | 1.6 dB max.  |
| Isolation:         | 23 dB min.   |
| Amplitude Balance: | 0.4 dB max.  |
| Phase Balance:     | 5° max.      |
| VSWR:              | 1.40:1 max.  |
| Input Power:       | 1 watts max. |
| Package Type:      | SMA          |

Input power is specified for load VSWR better than 1.20:1.  
BNC, TNC, and F connectors and other frequency ranges also available, contact sales.  
75 Ohm and higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 220628

