


# P4-11-452/4S

## 4-WAY SMA POWER DIVIDER

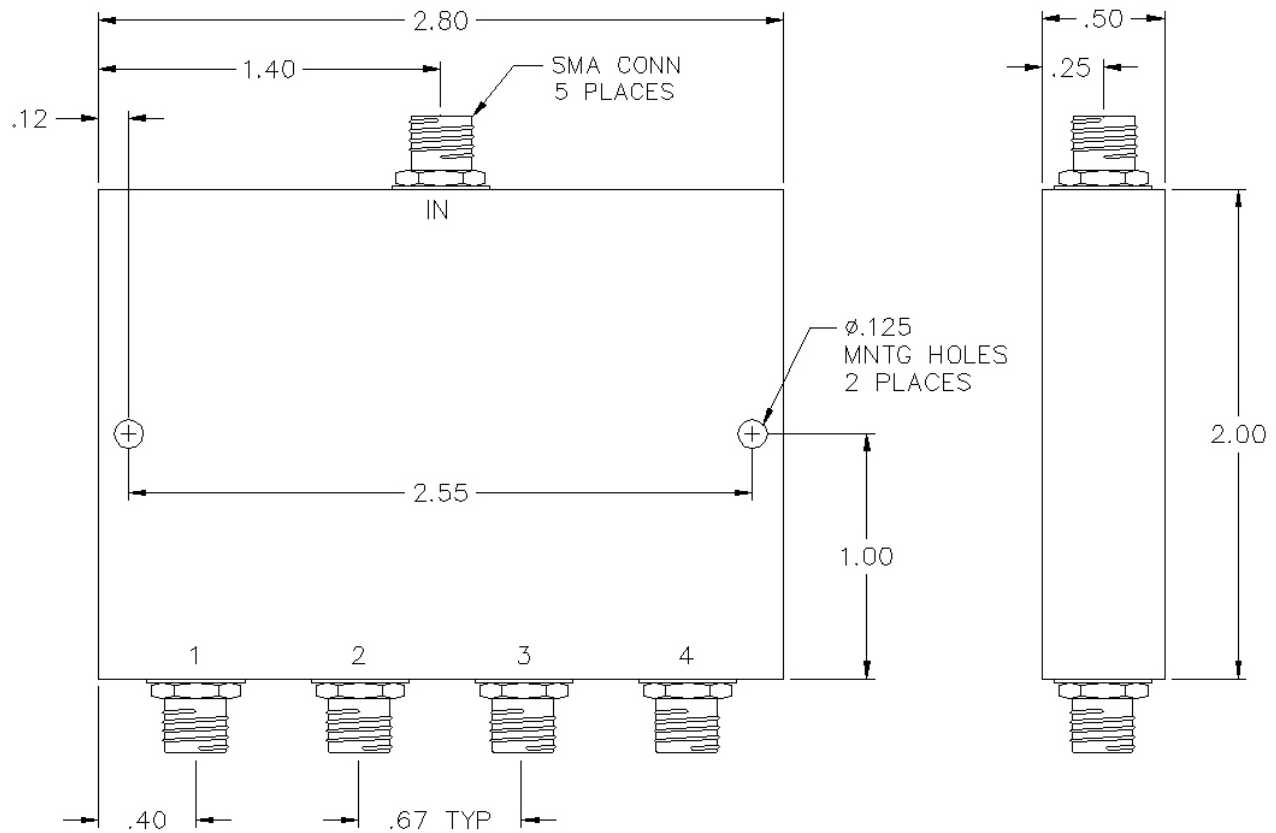

## SPECIFICATIONS

Name:	P4-11-452/4S
Frequency Range:	5-2000 MHz
Insertion Loss:	2.8 dB max.
Isolation:	20 dB min.
Amplitude Balance:	0.4 dB max.
Phase Balance:	8° max.
VSWR:	1.60:1 max.
Input Power:	1 watts max.
Package Type:	SMA

Input power is specified for load VSWR better than 1.20:1.  
BNC, TNC, and F connectors and other frequency ranges also available, contact sales.  
75 Ohm and higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 220628