


# P4-17-E

## 4-WAY SURFACE MOUNT POWER DIVIDER

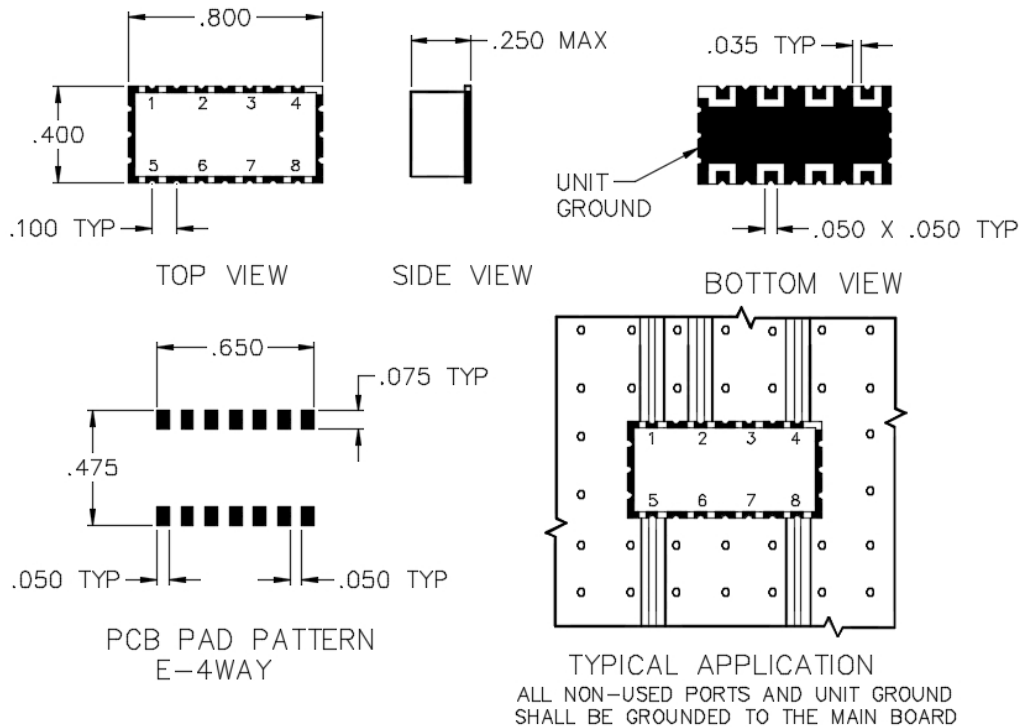

### SPECIFICATIONS

|                    |              |
|--------------------|--------------|
| Name:              | P4-17-E      |
| Frequency Range:   | 0.1-100 MHz  |
| Insertion Loss:    | 0.8 dB max.  |
| Isolation:         | 25 dB min.   |
| Amplitude Balance: | 0.2 dB max.  |
| Phase Balance:     | 2° max.      |
| VSWR:              | 1.30:1 max.  |
| Input Power:       | 1 watts max. |
| Package Type:      | Surface      |

Input power is specified for load VSWR better than 1.20:1.  
75 Ohm and higher power models available, contact sales.

### PORT CONFIGURATION

|         |            |
|---------|------------|
| Input:  | 2          |
| Output: | 1, 4, 5, 8 |
| Ground: | 3, 6, 7    |

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 160203