
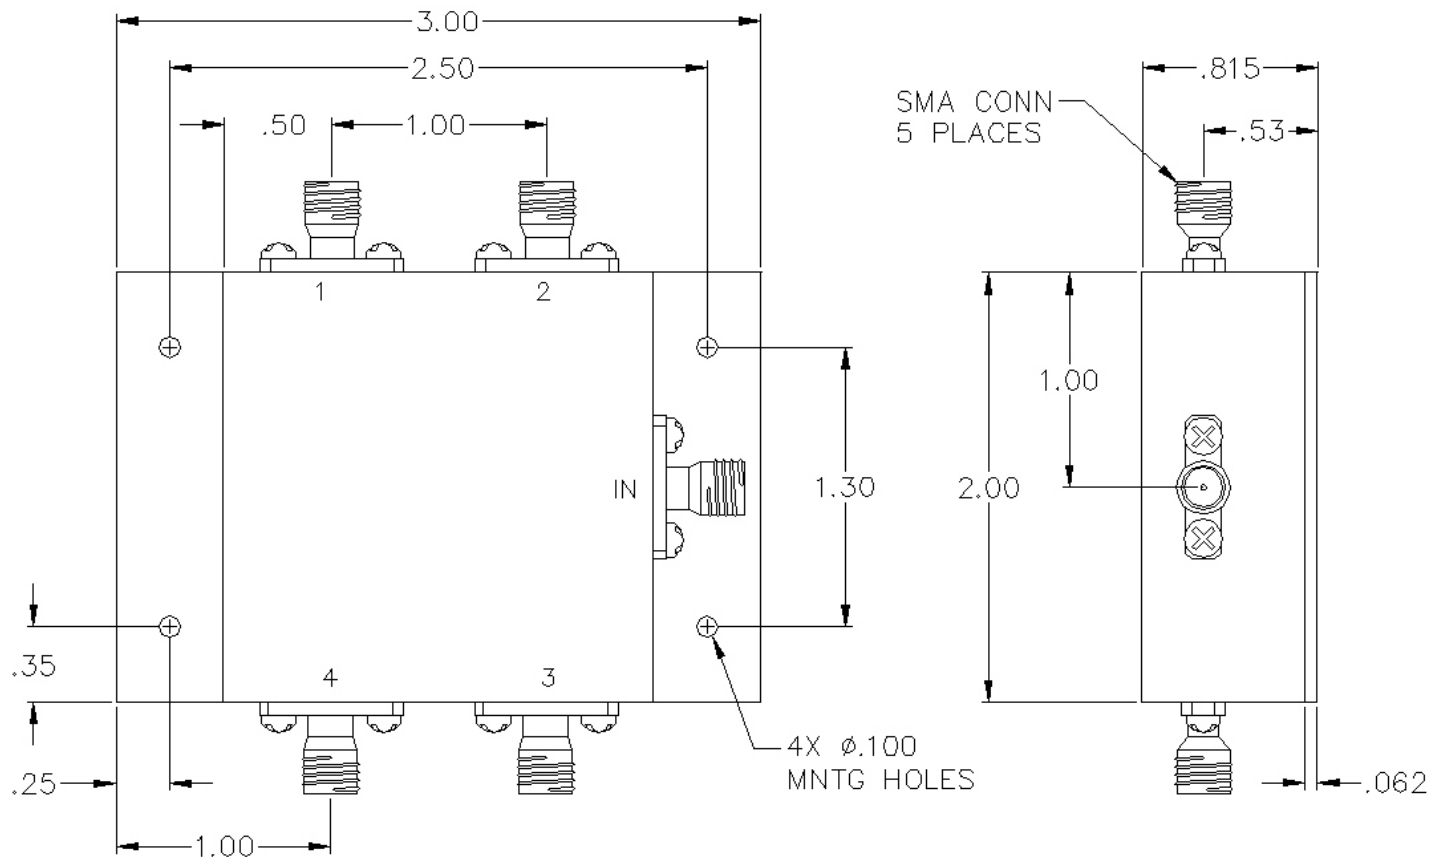


P4-P11-440

4-WAY SMA HIGH POWER COMBINER



SPECIFICATIONS

Name:	P4-P11-440
Frequency Range:	5-2200 MHz
Insertion Loss:	1.8 dB max.
Isolation:	15 dB min.
Max Power at Combined Port:	25 watts
Amplitude Balance:	0.5 dB max.
Phase Balance:	8° max.
VSWR:	1.80:1 max.
Package Type:	SMA

Available with SMA or N connectors.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 220628