


P6-03-302

6-WAY FLATPACK POWER DIVIDER

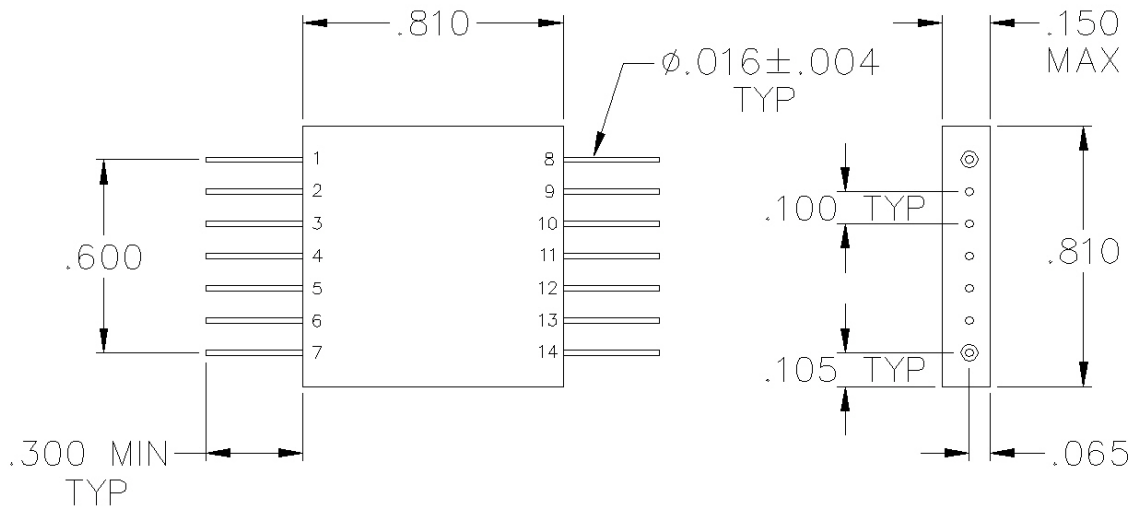

SPECIFICATIONS

Name:	P6-03-302
Frequency Range:	10-1000 MHz
Insertion Loss:	2.5 dB max.
Isolation:	22 dB min.
Amplitude Balance:	0.4 dB max.
Phase Balance:	6° max.
VSWR:	1.50:1 max.
Input Power:	1 watts max.
Package Type:	Pin

PORT CONFIGURATION

Input:	4
Output:	8-10, 12-14
Ground:	1-3, 5-7, 11

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190403

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION