


P6-03-F

6-WAY SURFACE MOUNT POWER DIVIDER

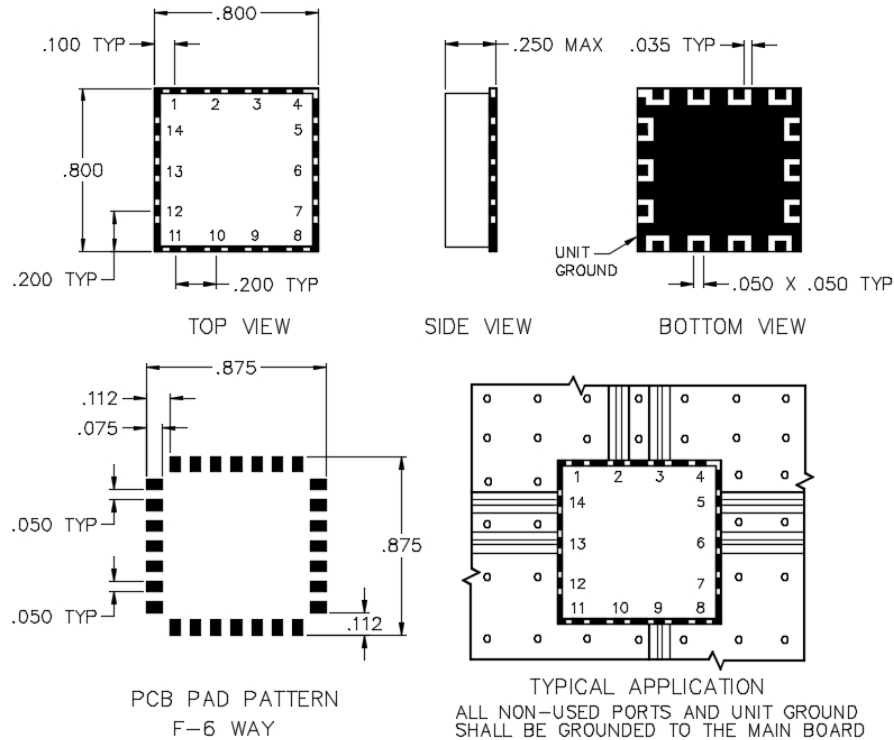

SPECIFICATIONS

Name:	P6-03-F
Frequency Range:	10-1000 MHz
Insertion Loss:	2.5 dB max.
Isolation:	22 dB min.
Amplitude Balance:	0.4 dB max.
Phase Balance:	6° max.
VSWR:	1.50:1 max.
Input Power:	1 watts max.
Package Type:	Surface

Input power is specified for load VSWR better than 1.20:1.
75 Ohm and higher power models available, contact sales.

PORT CONFIGURATION

Input:	9
Output:	2, 3, 5, 6, 13, 14
Ground:	1, 4, 7-12

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 160203