


PB-12-G

2-WAY SURFACE MOUNT HIGH POWER DIVIDER

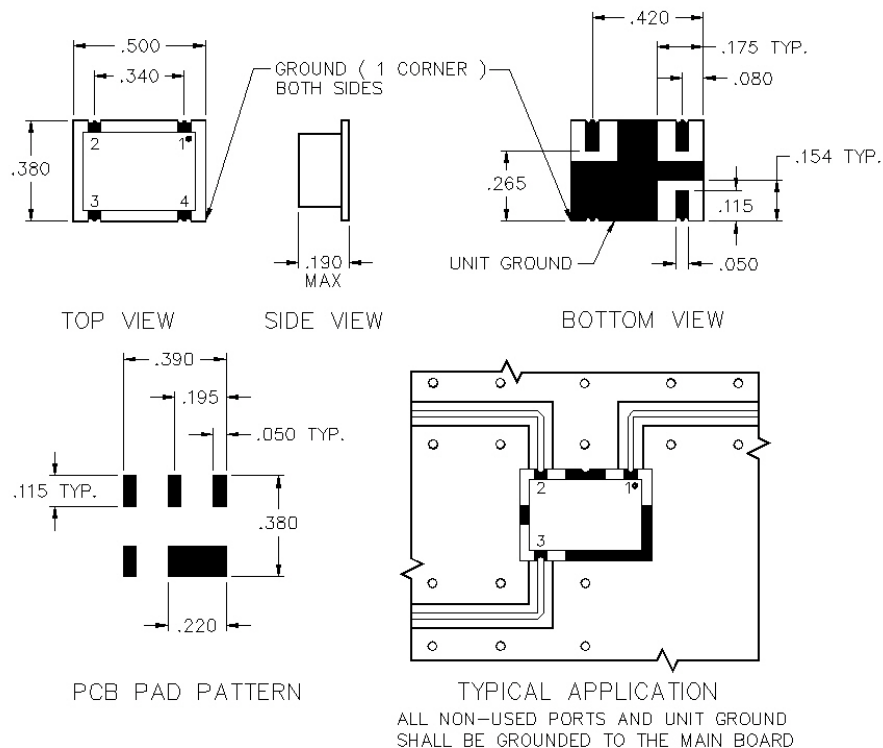

SPECIFICATIONS

| | |
|--------------------|---------------|
| Name: | PB-12-G |
| Frequency Range: | 2.3-2.7 GHz |
| Insertion Loss: | 0.7 dB max. |
| Isolation: | 18 dB min. |
| Amplitude Balance: | 0.3 dB max. |
| Phase Balance: | 3° max. |
| VSWR: | 1.40:1 max. |
| Input Power: | 10 watts max. |
| Package Type: | Surface |

PORT CONFIGURATION

| | |
|---------|------|
| Input: | 1 |
| Output: | 2, 3 |
| Ground: | 4 |

Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190326

