


# PS2-04-450/3S

## 2-WAY SMA POWER DIVIDER

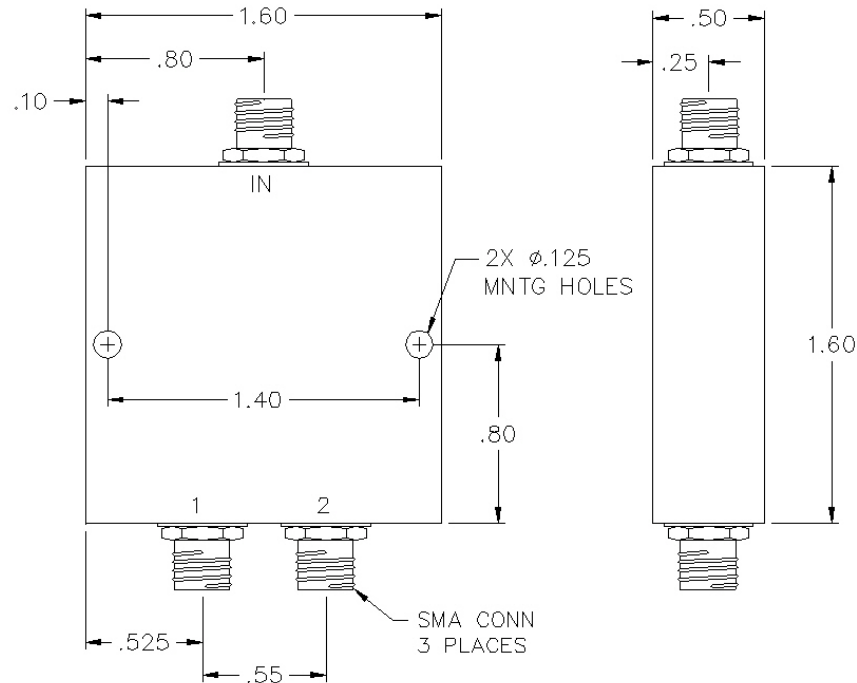

## SPECIFICATIONS

|                    |               |
|--------------------|---------------|
| Name:              | PS2-04-450/3S |
| Frequency Range:   | 0.8-1 GHz     |
| Insertion Loss:    | 0.3 dB max.   |
| Isolation:         | 23 dB min.    |
| Amplitude Balance: | 0.3 dB max.   |
| Phase Balance:     | 2° max.       |
| VSWR:              | 1.30:1 max.   |
| Input Power:       | 30 watts max. |
| Connector Type:    | SMA           |

Input power is specified for load VSWR better than 1.20:1.  
BNC, TNC, and F connectors and other frequency ranges also available, contact sales.  
Higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 190326

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

**PULSAR**  
MICROWAVE CORPORATION