


# PS3-01-451/4S

## 3-WAY SMA POWER DIVIDER

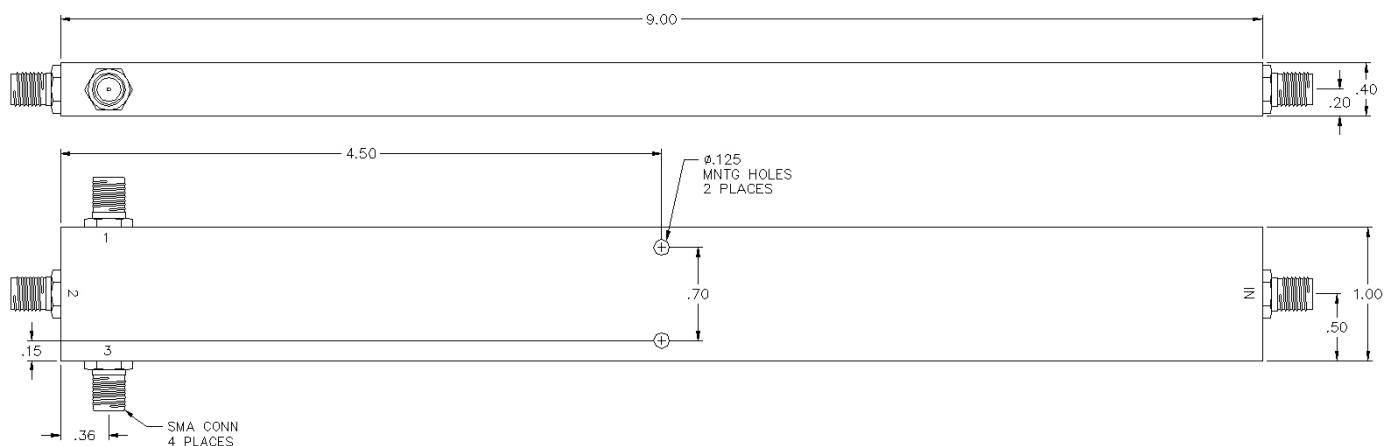

## SPECIFICATIONS

|                    |               |
|--------------------|---------------|
| Name:              | PS3-01-451/4S |
| Frequency Range:   | 0.5-1 GHz     |
| Insertion Loss:    | 0.6 dB max.   |
| Isolation:         | 17 dB min.    |
| Amplitude Balance: | 0.3 dB max.   |
| Phase Balance:     | 6° max.       |
| VSWR:              | 1.35:1 max.   |
| Input Power:       | 30 watts max. |
| Connector Type:    | SMA           |

Input power is specified for load VSWR better than 1.20:1.

BNC, TNC, and F connectors and other frequency ranges also available, contact sales.

Higher power models available, contact sales.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 190326

