
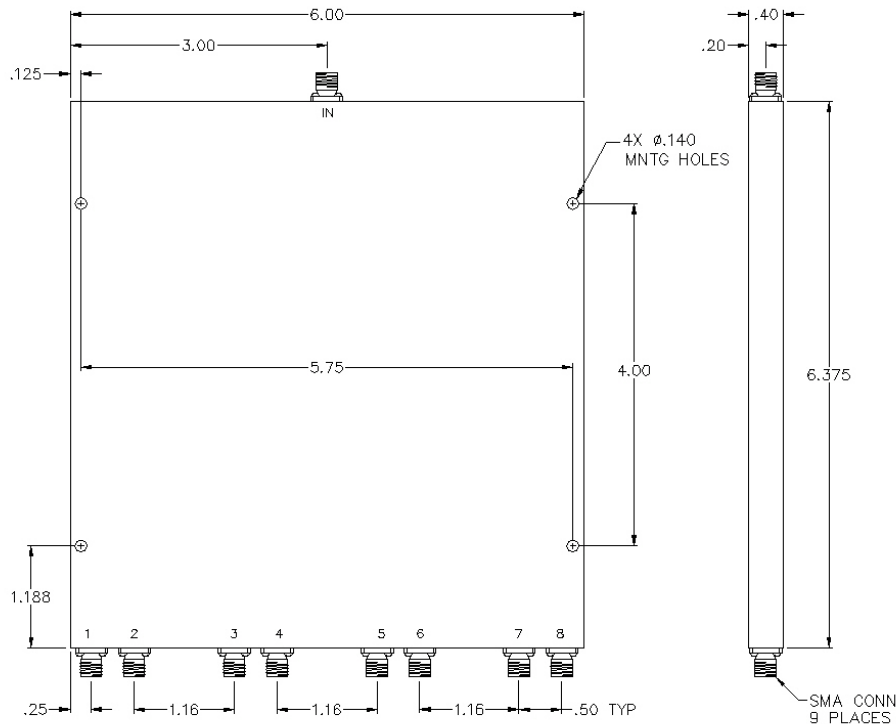


# PS8-16-454/8S

## 8-WAY SMA POWER DIVIDER



## SPECIFICATIONS

Name:	PS8-16-454/8S
Frequency Range:	0.5-18 GHz
Insertion Loss:	7.0 dB max.
Isolation:	16 dB min.
Amplitude Balance:	1.2 dB max.
Phase Balance:	15° max.
VSWR:	1.60:1 max.
Input Power:	30 watts max.
Connector Type:	SMA

Input power is specified for load VSWR better than 1.20:1.  
BNC, TNC, and F connectors and other frequency ranges also available, contact sales.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 190326