
3 DB SMA 90° HYBRID COUPLER



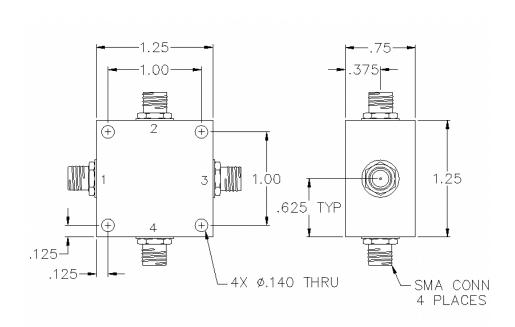

PORT CONFIGURATION

4

2

3

Housing

Input: 90° Output:

0° Output:

Isolated:

Ground:

SPECIFICATIONS

Name: Q2-13-412

Bandwidth: 2:1

Frequency Range: 200-400 MHz Insertion Loss: 0.7 dB max.

Isolation: 18 dB min.

Amplitude Balance: 0.8 dB max.

Phase Balance: 3° max. VSWR: 1.40:1 max.

Package Type: SMA

Power rating 1 watt max. for load VSWR better than 1.20:1.

SMA female connectors standard, also available with BNC, TNC, F, and N connectors.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales. All specifications are subject to change without notice at any time. Rev: 220628

