


RP2-01-417F

2-WAY SMA RESISTIVE POWER DIVIDER

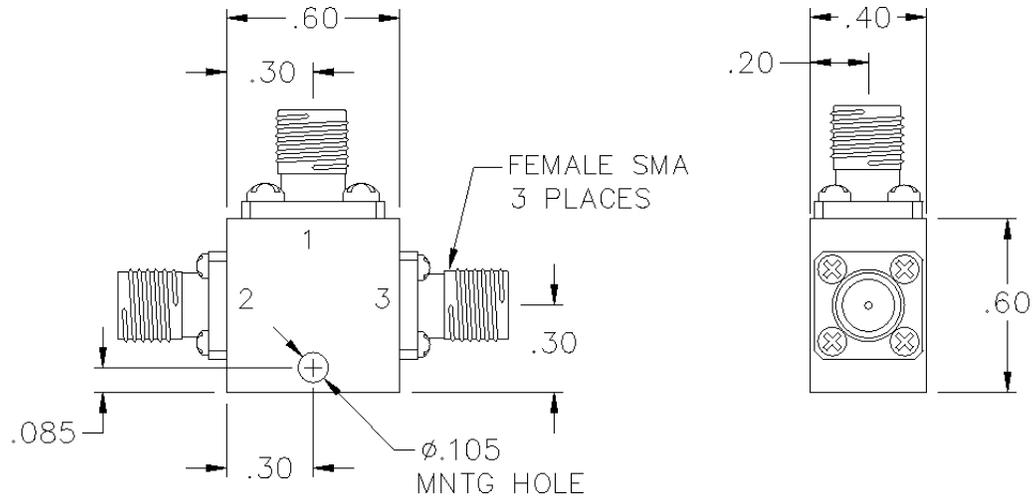

SPECIFICATIONS

Name:	RP2-01-417F
Frequency Range:	DC-10 GHz
Insertion Loss:	0.8 dB max.
Amplitude Balance:	0.3 dB max.
Phase Balance:	5° max.
VSWR:	1.40:1 max.
Input Power:	0.5 watts max.
Connector Type:	SMA

Insertion Loss does not include 6 dB theoretical loss.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190620

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION