


SO-06-F

SURFACE MOUNT ANALOG PHASE SHIFTER

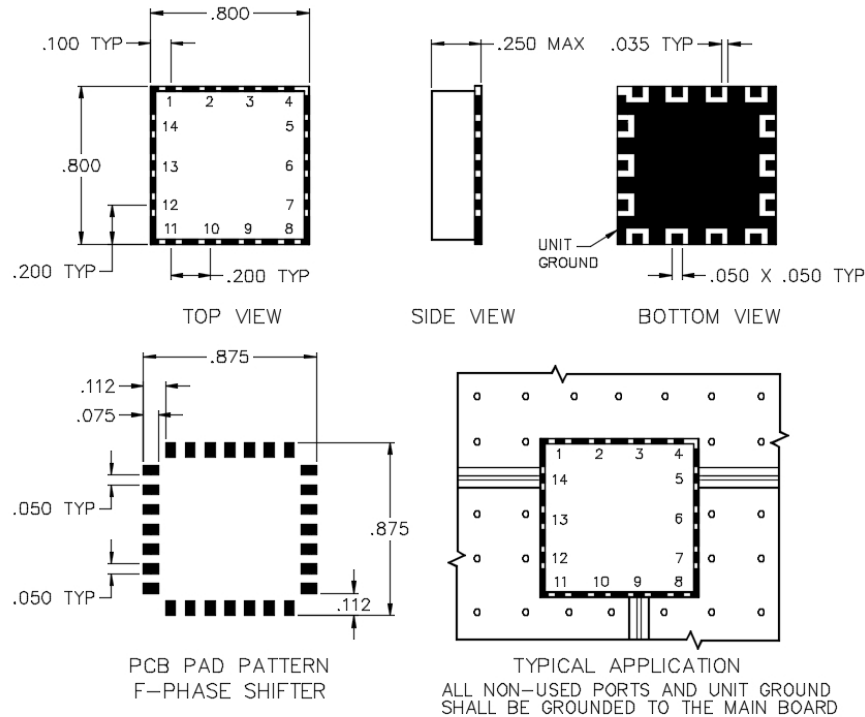

SPECIFICATIONS

| | |
|------------------|-------------|
| Name: | SO-06-F |
| Frequency Range: | 150-280 MHz |
| Insertion Loss: | 2.2 dB max. |
| Phase Shift: | 180° min. |
| Control Voltage: | 0-30 Volts |
| VSWR: | 1.70:1 max. |
| Package Type: | Surface |

Maximum input power is +5 dBm.
Other frequencies, phase shift ranges, and control voltages available.

PORT CONFIGURATION

| | |
|----------|------------|
| Input: | 14 |
| Output: | 5 |
| Control: | 9 |
| Ground: | All Others |

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 160203