
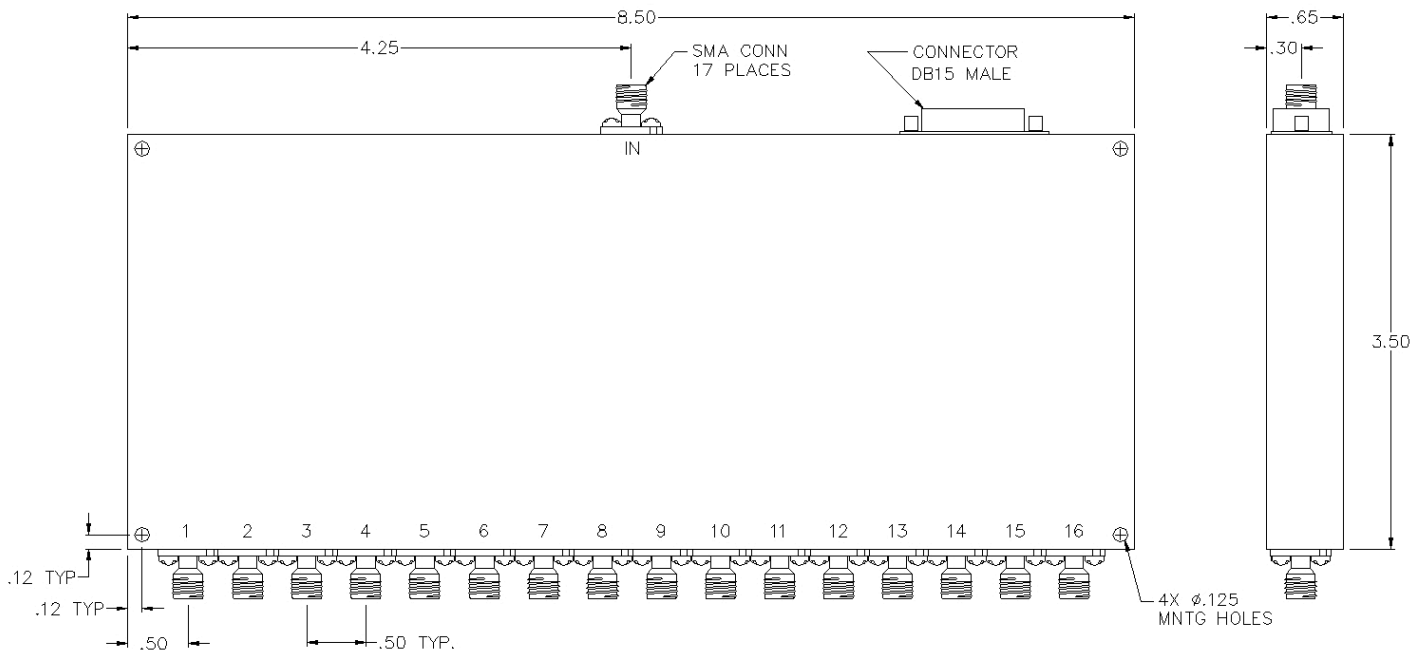


SW16AD-21

SP16T SMA ABSORPTIVE SWITCH



SPECIFICATIONS

Name:	SW16AD-21
Input Frequency Range:	0.5-8 GHz
Switch Type:	SP16T
Insertion Loss:	5.5 dB max.
Input Power:	200 mw / 23 dBm
Isolation:	60 dB min.
VSWR:	1.90:1
Switching Time:	100 nsec
Connector Type:	SMA

DECODER INPUT CONTROL



Pin 01 = A (Control)	Pin 05 - 12 = N/C
Pin 02 = B	Pin 13 = +5V
Pin 03 = C	Pin 14 = -5V
Pin 04 = D	Pin 15 = Ground

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250512

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION