
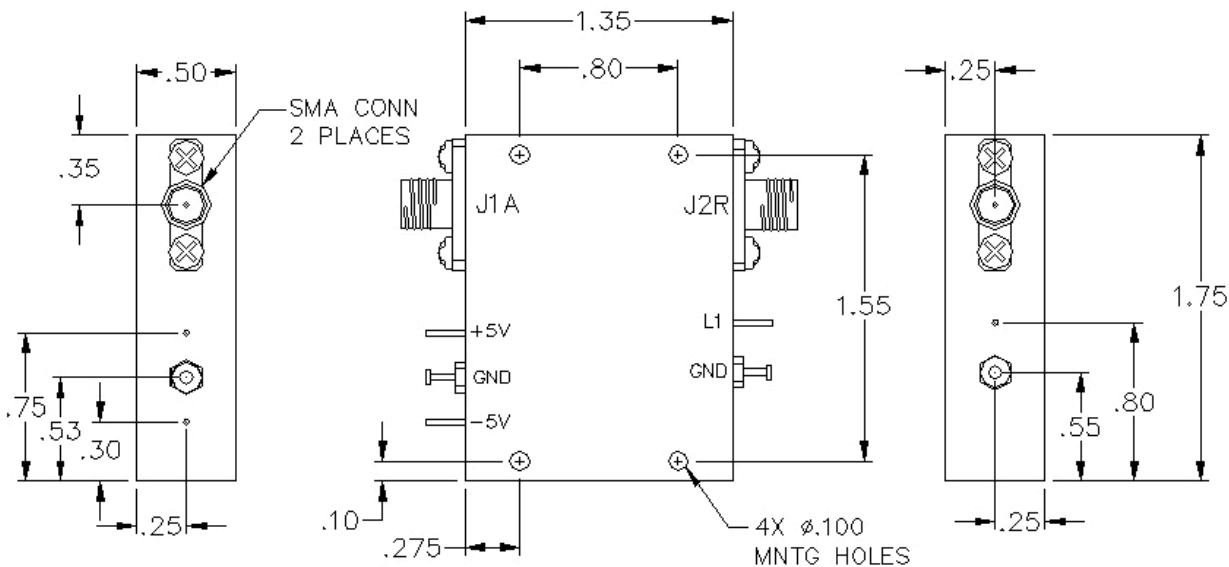


# SW1AD-10

## SPST ABSORPTIVE PIN DIODE SWITCH



### SPECIFICATIONS

Name:	SW1AD-10
Input Frequency Range:	0.1-1 GHz
Switch Type:	SP1T
Insertion Loss:	1.2 dB max.
Input Power:	200 mw / 23 dBm
Isolation:	60 dB min.
VSWR:	1.60:1
Switching Time:	100 nsec
Connector Type:	SMA

### TTL CONTROL LOGIC

L1	J1-J2
0	Insertion Loss
1	Isolation

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250614