
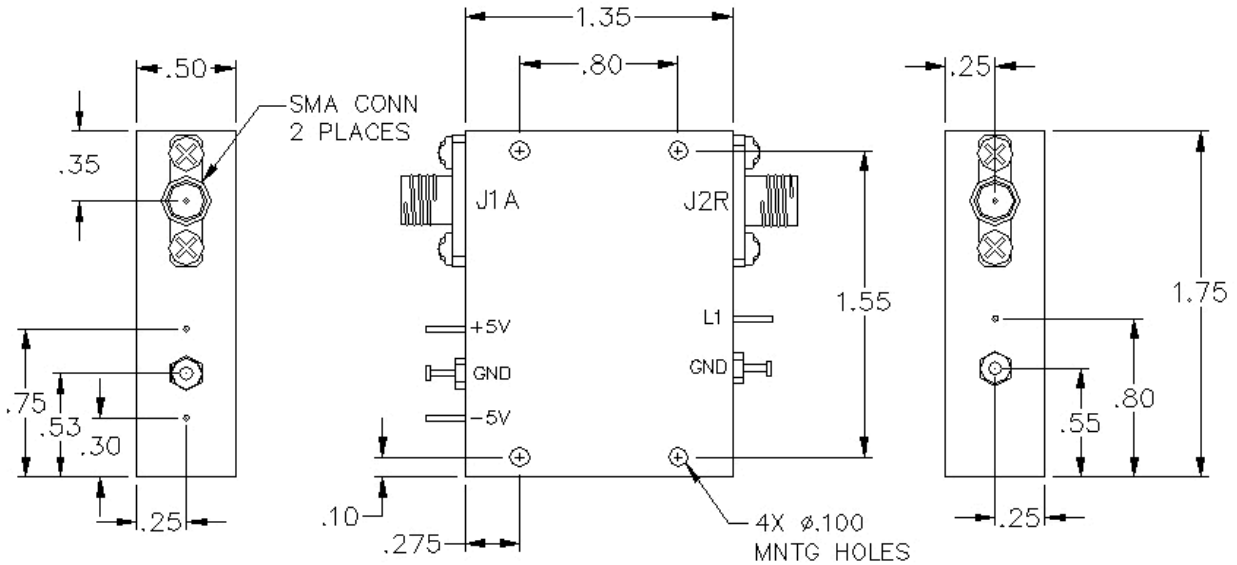


SW1AD-15

SPST ABSORPTIVE PIN DIODE SWITCH



SPECIFICATIONS

Name:	SW1AD-15
Input Frequency Range:	2-8 GHz
Switch Type:	SP1T
Insertion Loss:	2.2 dB max.
Input Power:	200 mw / 23 dBm
Isolation:	55 dB min.
VSWR:	1.60:1
Switching Time:	100 nsec
Connector Type:	SMA

TTL CONTROL LOGIC

L1	J1-J2
0	Insertion Loss
1	Isolation

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250614