
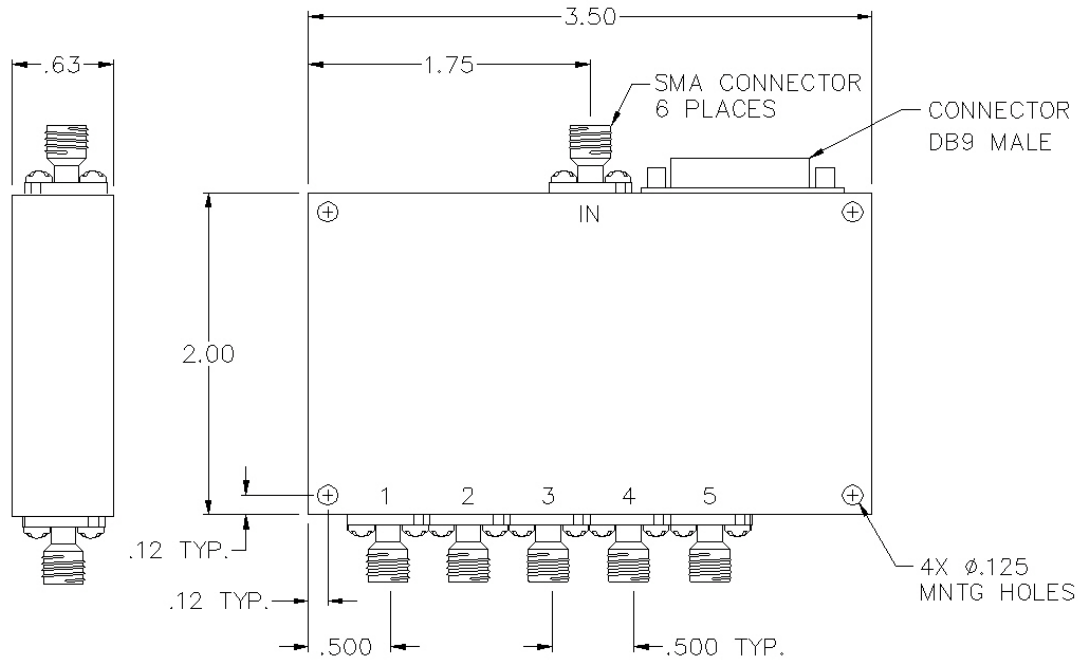


SW5RD-10


SMA SWITCH



SPECIFICATIONS

Name:	SW5RD-10
Input Frequency Range:	0.5-2 GHz
Switch Type:	SP5T
Insertion Loss:	2.0 dB max.
Input Power:	200 mw / 23 dBm
Isolation:	60 dB min.
VSWR:	1.60:1
Switching Time:	100 nsec
Connector Type:	SMA

ITT CANNON PIN-OUT



Pin 1 = J1 (Control)	Pin 6 = N/C
Pin 2 = J2	Pin 7 = Ground
Pin 3 = J3	Pin 8 = +5V
Pin 4 = J4	Pin 9 = -5V
Pin 5 = J5	

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190326

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION