
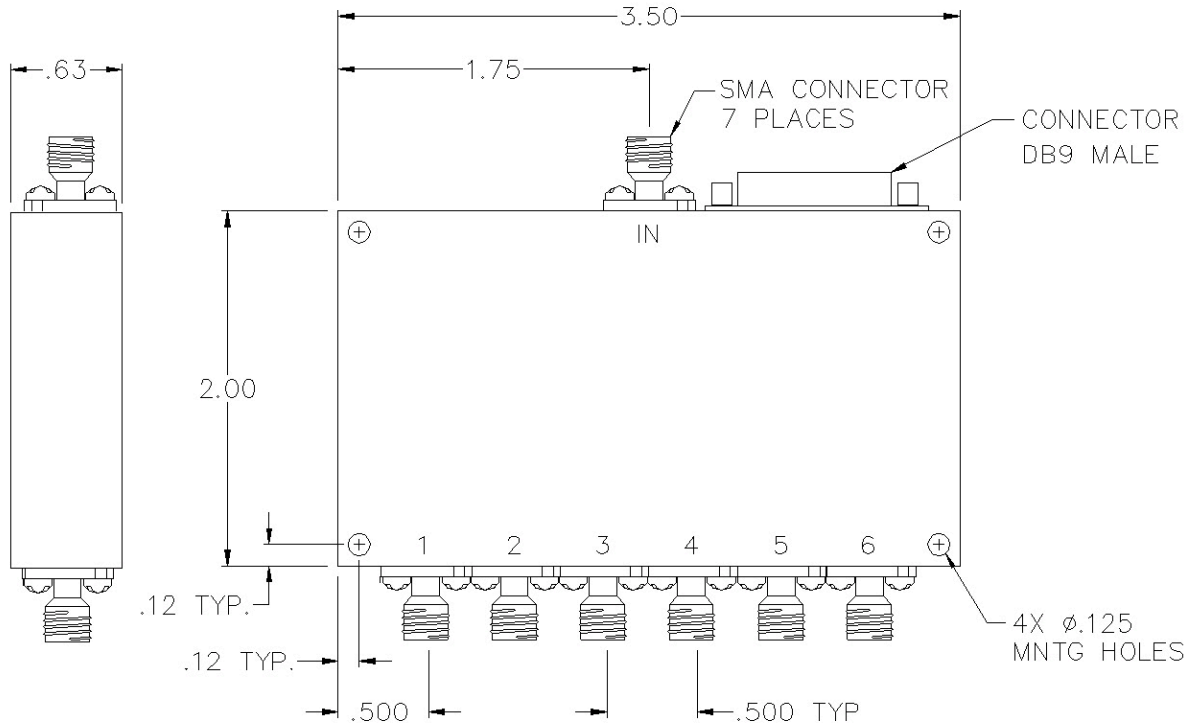


# SW6RD-11


## SP6T REFLECTIVE PIN DIODE SWITCH



### SPECIFICATIONS

Name:	SW6RD-11
Input Frequency Range:	1-4 GHz
Switch Type:	SP6T
Insertion Loss:	2.4 dB max.
Input Power:	200 mw / 23 dBm
Isolation:	60 dB min.
VSWR:	1.60:1
Switching Time:	100 nsec
Connector Type:	SMA

### ITT CANNON PIN-OUT



Pin 1 = J1 (Control)	Pin 6 = J6
Pin 2 = J2	Pin 7 = Ground
Pin 3 = J3	Pin 8 = +5V
Pin 4 = J4	Pin 9 = -5V
Pin 5 = J5	

This is a commercial off the shelf (COTS) product.  
 For an equivalent product that meets DFARS materials compliance, contact sales.  
 All specifications are subject to change without notice at any time. Rev: 250614

