
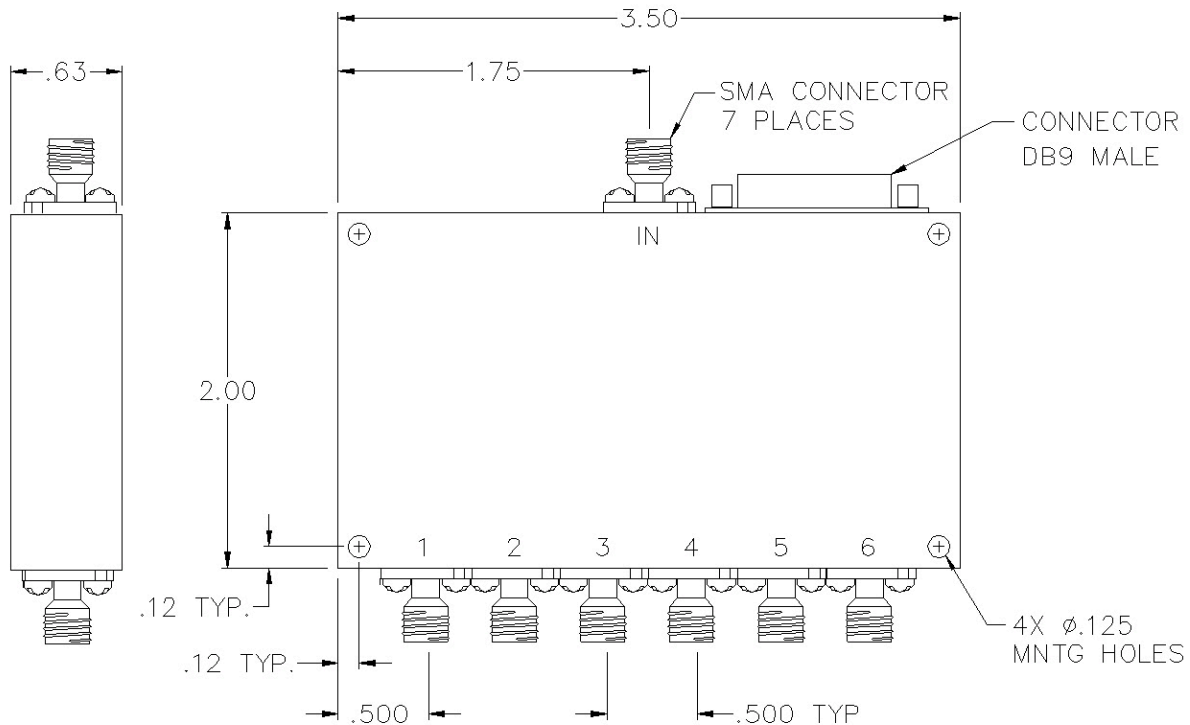


# SW6RD-12


## SP6T SMA REFLECTIVE SWITCH



## SPECIFICATIONS

Name:	SW6RD-12
Input Frequency Range:	2-8 GHz
Switch Type:	SP6T
Insertion Loss:	3.2 dB max.
Input Power:	200 mw / 23 dBm
Isolation:	60 dB min.
VSWR:	1.60:1
Switching Time:	100 nsec
Connector Type:	SMA

## ITT CANNON PIN-OUT



Pin 1 = J1 (Control)	Pin 6 = J6
Pin 2 = J2	Pin 7 = Ground
Pin 3 = J3	Pin 8 = +5V
Pin 4 = J4	Pin 9 = -5V
Pin 5 = J5	

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250512

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

**PULSAR**  
MICROWAVE CORPORATION