
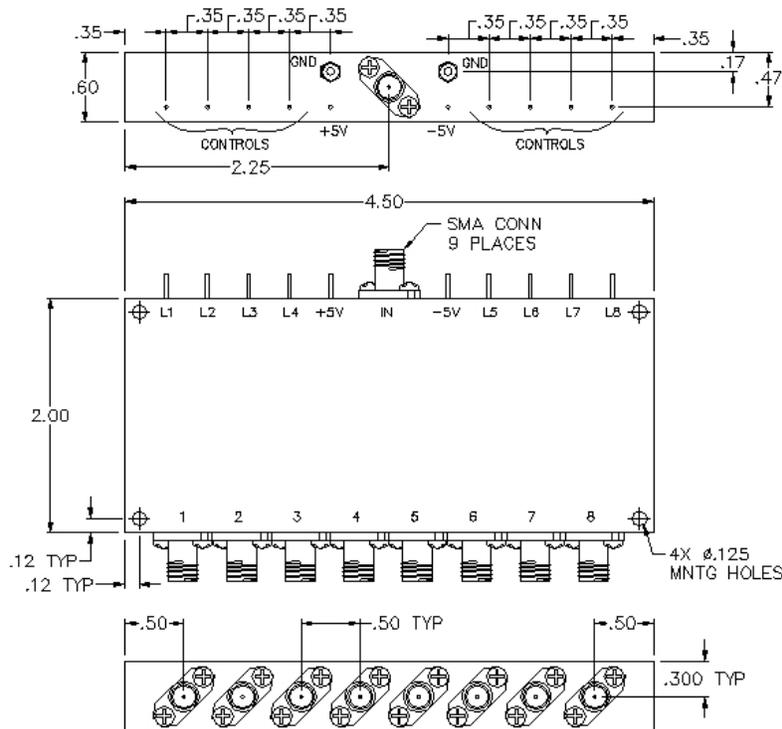


SW8RD-11

SP8T SMA REFLECTIVE SWITCH



SPECIFICATIONS

| | |
|------------------------|-----------------|
| Name: | SW8RD-11 |
| Input Frequency Range: | 1-4 GHz |
| Switch Type: | SP8T |
| Insertion Loss: | 2.4 dB max. |
| Input Power: | 200 mw / 23 dBm |
| Isolation: | 60 dB min. |
| VSWR: | 1.60:1 |
| Switching Time: | 100 nsec |
| Connector Type: | SMA |

TTL CONTROL LOGIC

When L(1-8) = TTL LOW, Output(1-8) = Loss
When L(1-8) = TTL HIGH, Output(1-8) = Isolation

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 170201