X1V-11-A

AC COUPLED TRIPLE BALANCED MIXER



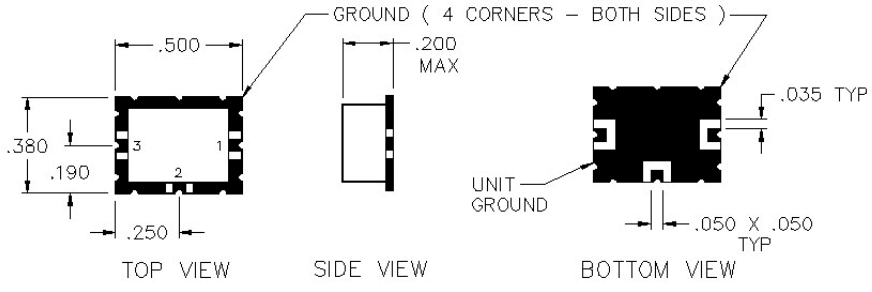

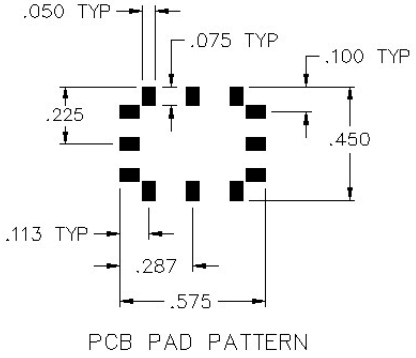

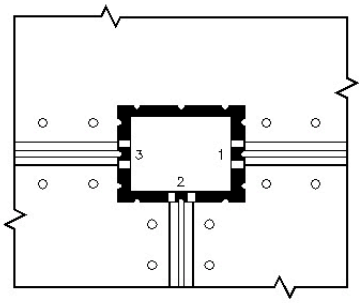

ALL NON–USED PORTS AND UNIT GROUND
SHALL BE GROUNDED TO THE MAIN BOARD

SPECIFICATIONS

Name:	X1V-11-A
Frequency Range:	
LO/RF:	5-4200 MHz
IF:	5-2000 MHz
LO Drive:	+27 dBm
Conversion Loss:	10.0 dB max.
1 dB Compression Point:	+20 dBm typ.
Isolation:	
L/R:	20 dB min.
L/I:	25 dB min.
Connector Type:	Surface

PORT CONFIGURATION

RF:	1
LO:	3
IF:	2
Ground:	4 Corners

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 250614

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com