


X2L-07-414

DC COUPLED DOUBLE BALANCED MIXER FROM 800 TO 1000 MHZ - SMA

Image Not Available

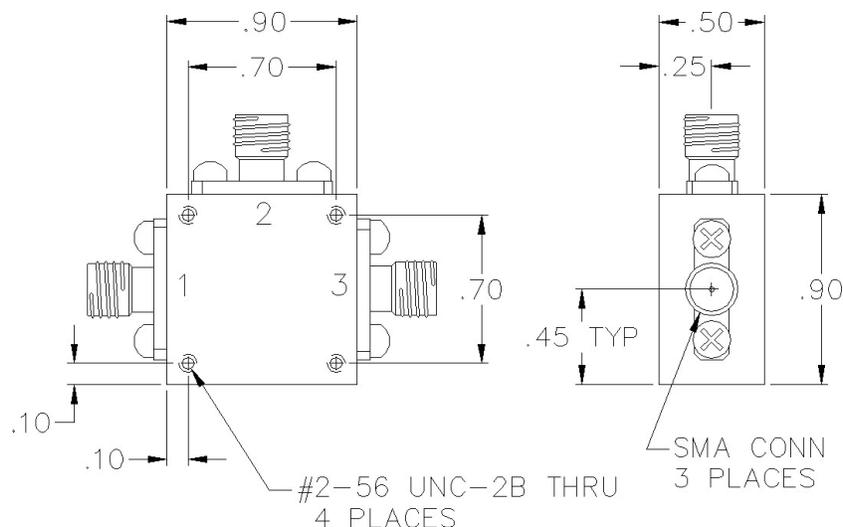

SPECIFICATIONS

Name:	X2L-07-414
Frequency Range:	
LO/RF:	800-1000 MHz
IF:	DC-200 MHz
LO Drive:	+7 dBm
Conversion Loss:	7.5 dB max.
1 dB Compression Point:	+1 dBm typ.
Isolation:	
L/R:	25 dB min.
L/I:	20 dB min.
Connector Type:	SMA

PORT CONFIGURATION

RF:	1
LO:	3
IF:	2
Ground:	Housing

IF polarity is negative for DC coupled mixers.

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250614