


SO-03-302

FLATPACK ANALOG PHASE SHIFTER

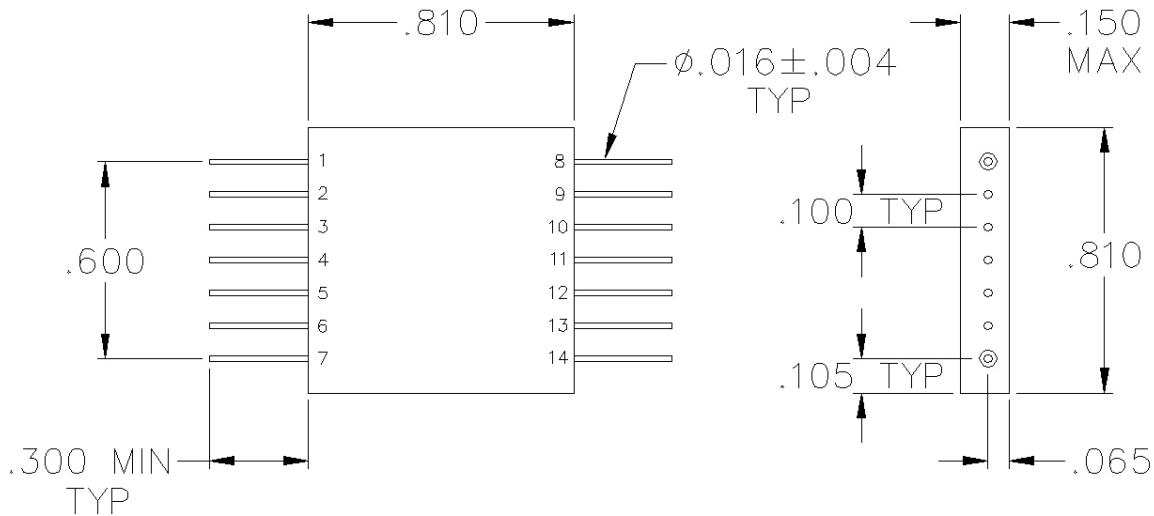

SPECIFICATIONS

Name:	SO-03-302
Frequency Range:	40-80 MHz
Insertion Loss:	2.0 dB max.
Phase Shift:	180° min.
Control Voltage:	0-30 Volts
VSWR:	1.70:1 max.
Package Type:	Pin

Maximum input power is +5 dBm.
Other frequencies, phase shift ranges, and control voltages available.

PORT CONFIGURATION

Input:	14
Output:	7
Control:	1, 8
Ground:	2-6, 9-13