


# SO-03-F

## SURFACE MOUNT ANALOG PHASE SHIFTER

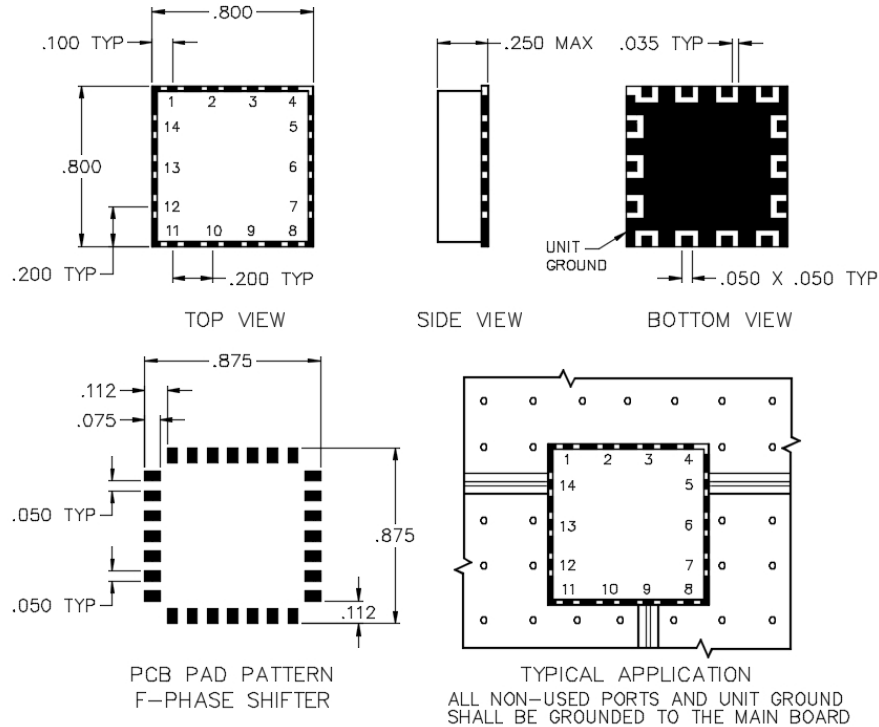

## SPECIFICATIONS

Name:	SO-03-F
Frequency Range:	40-80 MHz
Insertion Loss:	2.0 dB max.
Phase Shift:	180° min.
Control Voltage:	0-30 Volts
VSWR:	1.70:1 max.
Package Type:	Surface

Maximum input power is +5 dBm.  
Other frequencies, phase shift ranges, and control voltages available.

## PORT CONFIGURATION

Input:	14
Output:	5
Control:	9
Ground:	All Others