


# SO-06-302

## FLATPACK ANALOG PHASE SHIFTER

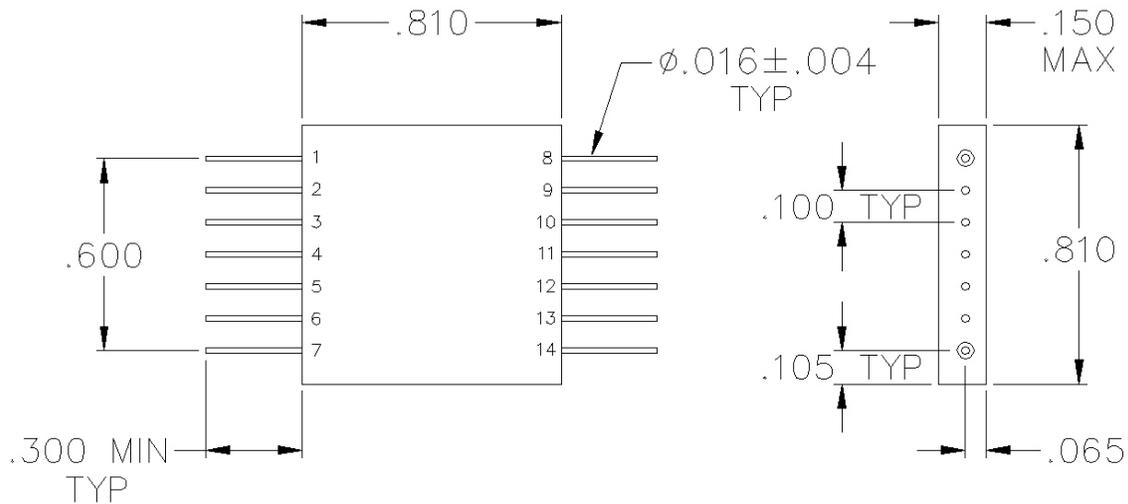

### SPECIFICATIONS

Name:	SO-06-302
Frequency Range:	150-280 MHz
Insertion Loss:	2.2 dB max.
Phase Shift:	180° min.
Control Voltage:	0-30 Volts
VSWR:	1.70:1 max.
Package Type:	Pin

### PORT CONFIGURATION

Input:	14
Output:	7
Control:	1, 8
Ground:	2-6, 9-13

Maximum input power is +5 dBm.  
Other frequencies, phase shift ranges, and control voltages available.

This is a commercial off the shelf (COTS) product.  
For an equivalent product that meets DFARS materials compliance, contact sales.  
All specifications are subject to change without notice at any time. Rev: 190403

