
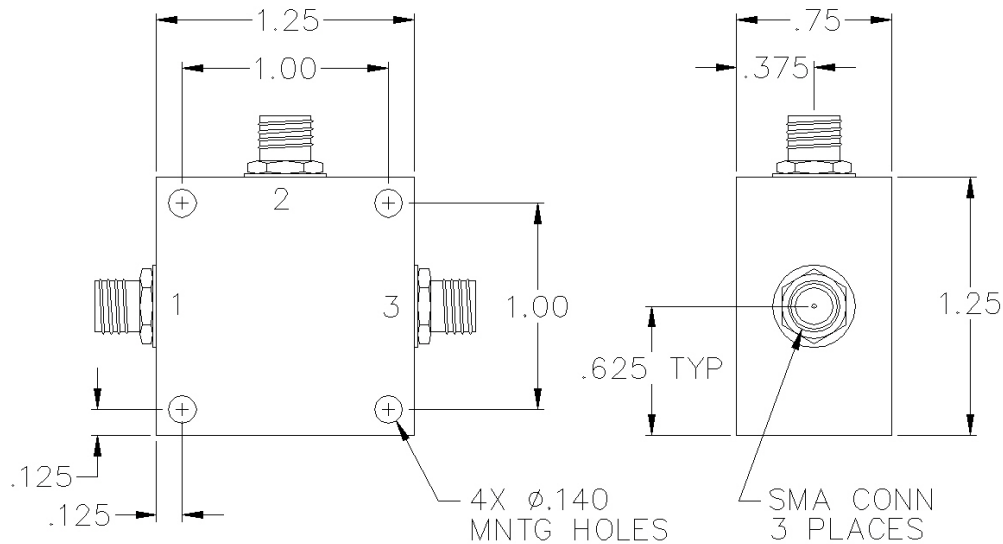


# ST-03-411

## SMA ANALOG PHASE SHIFTER



### SPECIFICATIONS

Name:	ST-03-411
Frequency Range:	28.5-31.5 MHz
Insertion Loss:	1.3 dB max.
Phase Shift:	180° min.
Control Voltage:	0-30 Volts
VSWR:	1.70:1 max.
Package Type:	SMA

### PORT CONFIGURATION

Input:	1
Output:	3
Control:	2
Ground:	Housing

Maximum input power is +5 dBm.  
Other frequencies, phase shift ranges, and control voltages available.