


ST-13-302

FLATPACK ANALOG PHASE SHIFTER

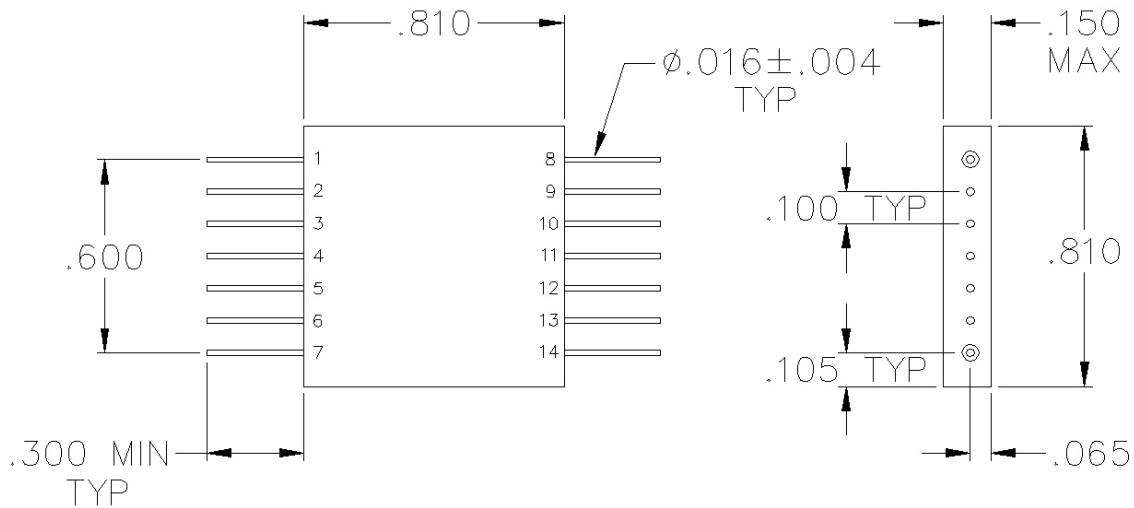

SPECIFICATIONS

Name:	ST-13-302
Frequency Range:	935-960 MHz
Insertion Loss:	2.2 dB max.
Phase Shift:	180° min.
Control Voltage:	0-30 Volts
VSWR:	1.70:1 max.
Package Type:	Pin

Maximum input power is +5 dBm.
Other frequencies, phase shift ranges, and control voltages available.

PORT CONFIGURATION

Input:	14
Output:	7
Control:	1, 8
Ground:	2-6, 9-13

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190403