


# ST-15-302

## FLATPACK ANALOG PHASE SHIFTER

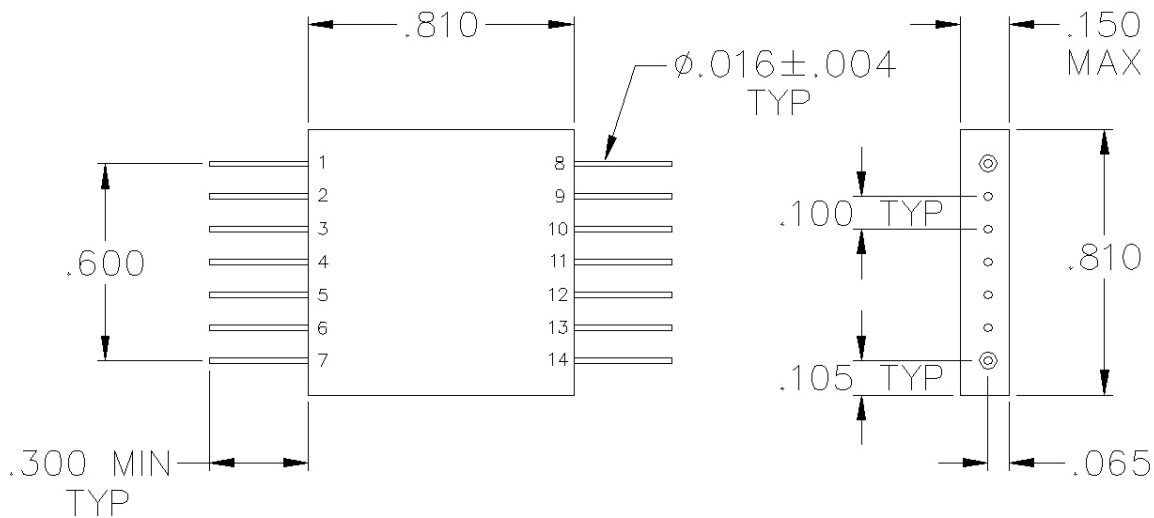

### SPECIFICATIONS

Name:	ST-15-302
Frequency Range:	1710-1735 MHz
Insertion Loss:	2.8 dB max.
Phase Shift:	180° min.
Control Voltage:	0-30 Volts
VSWR:	1.70:1 max.
Package Type:	Pin

### PORT CONFIGURATION

Input:	14
Output:	7
Control:	1, 8
Ground:	2-6, 9-13

Maximum input power is +5 dBm.  
Other frequencies, phase shift ranges, and control voltages available.