
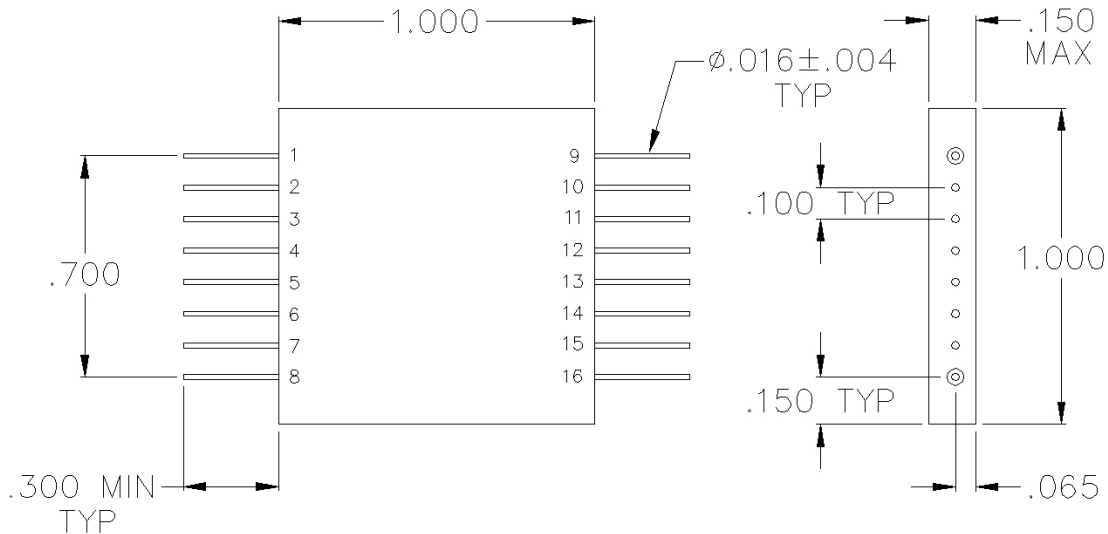


ST-18-303

FLATPACK ANALOG PHASE SHIFTER



SPECIFICATIONS

Name:	ST-18-303
Frequency Range:	9.8-10.2 MHz
Insertion Loss:	3.0 dB max.
Phase Shift:	360° min.
Control Voltage:	0-10 Volts
VSWR:	1.70:1 max.
Package Type:	Pin

PORT CONFIGURATION

Input:	1
Output:	9
Control:	8
Ground:	2-7, 10-16

Maximum input power is +5 dBm.
Other frequencies, phase shift ranges, and control voltages available.