


IM-05-E

SINGLE SIDEBAND IQ MODULATOR

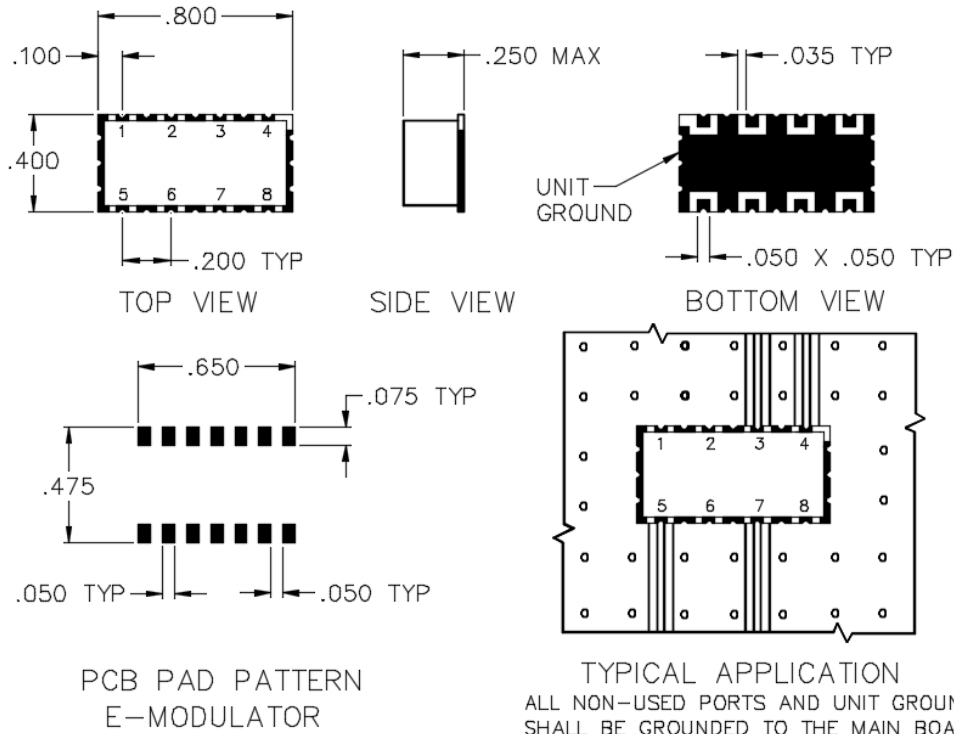

SPECIFICATIONS

Name:	IM-05-E	Carrier:	5
Carrier Frequency (+10 dBm):	66.5-73.5 MHz	Mod. I:	3
Modulation Frequency (-10 dBm):	DC-20 MHz	Mod. Q:	7
Carrier Power:	+10 dBm nom.	RF Out:	4
Conversion Loss:	7.5 dB max.	Ground:	1, 2, 6, 8
Compression Point:	0 dBm min.		
Sideband Rejection:	30 dBc min.		
Carrier Rejection:	30 dBc min.		
Connector Type:	Surface		

PORT CONFIGURATION

Single Sideband Modulators do not include baseband quadrature hybrids.
Lower Sideband is suppressed when modulation frequency Q is +90° relative to modulation frequency I.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 160203

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

PULSAR
MICROWAVE CORPORATION