


IM-09-302

SINGLE SIDEBAND IQ MODULATOR

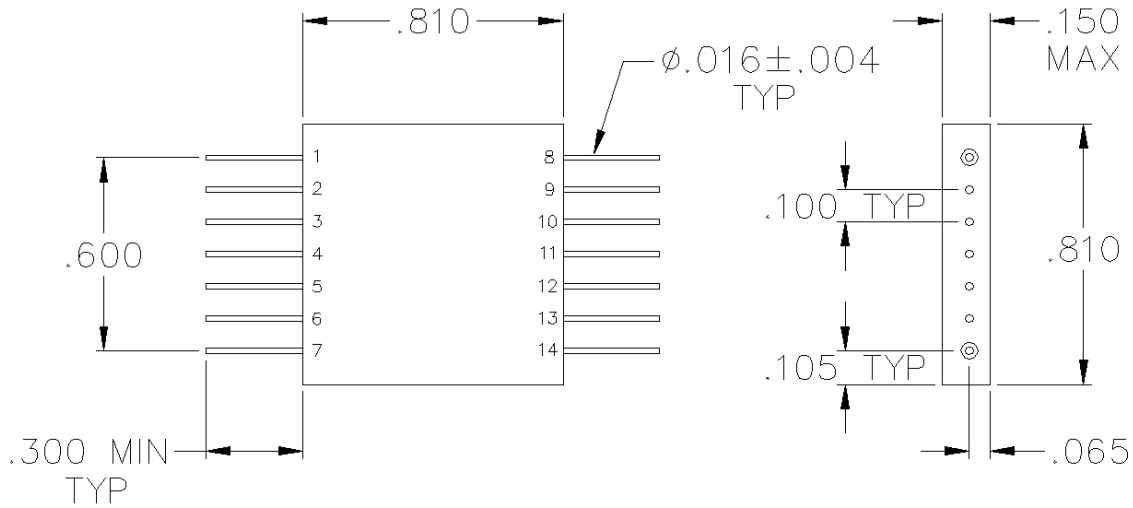

SPECIFICATIONS

Name:	IM-09-302	Carrier:	1
Carrier Frequency (+10 dBm):	285-315 MHz	Mod. I:	12
Modulation Frequency (-10 dBm):	DC-100 MHz	Mod. Q:	5
Carrier Power:	+10 dBm nom.	RF Out:	14
Conversion Loss:	8.0 dB max.	Ground:	2-4, 6-11, 13
Compression Point:	0 dBm min.		
Sideband Rejection:	30 dBc min.		
Carrier Rejection:	30 dBc min.		
Connector Type:	Pin		

PORT CONFIGURATION

Single Sideband Modulators do not include baseband quadrature hybrids.
Lower Sideband is suppressed when modulation frequency Q is +90° relative to modulation frequency I.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190403

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com

