
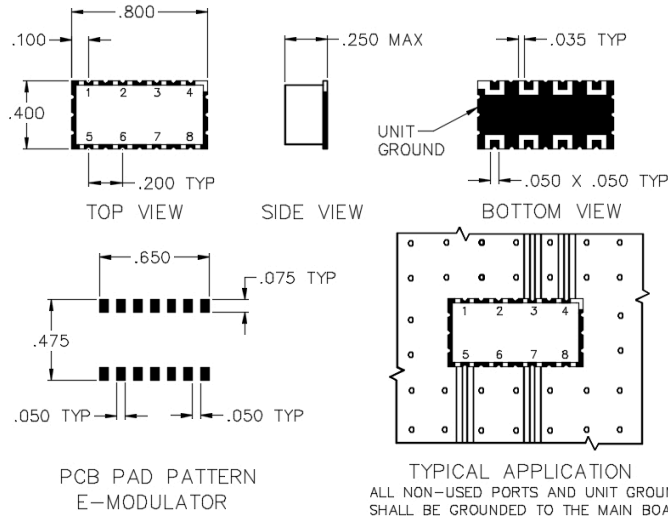


# MT-16-E

## QUADRAPHASE MODULATOR



## SPECIFICATIONS

Name:	MT-16-E
Frequency Range:	1805-1880 MHz
Insertion Loss:	9.5 dB max.
1 dB Compression Point:	+4 dBm min.
Amplitude Balance:	1.0 dB max.
Phase Balance:	7° max.
VSWR:	1.70:1 max.
Package Type:	Surface

Specifications are for a drive current of  $\pm 20$  mA.  
 Maximum RF input power is +10 dBm.  
 TTL Control option available, contact sales.

## PORT CONFIGURATION

Input:	5
Output:	3
D1:	7
D2:	4
Ground:	1, 2, 6, 8

## TRUTH TABLE

Phase	D1 (mA)	D2 (mA)
0°	+20	+20
90°	+20	-20
180°	-20	-20
270°	-20	+20

This is a commercial off the shelf (COTS) product.

For an equivalent product that meets DFARS materials compliance, contact sales.

All specifications are subject to change without notice at any time. Rev: 250614